RoHS Compliant

Rev.	change details	effective date	updated by	date
A	Initial release	2020.12.19	FHY	20.12.19

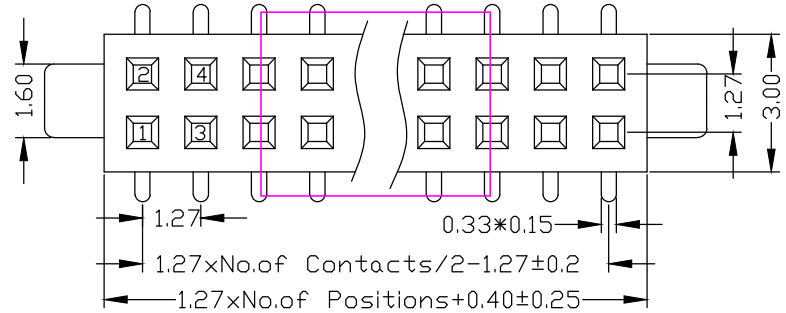

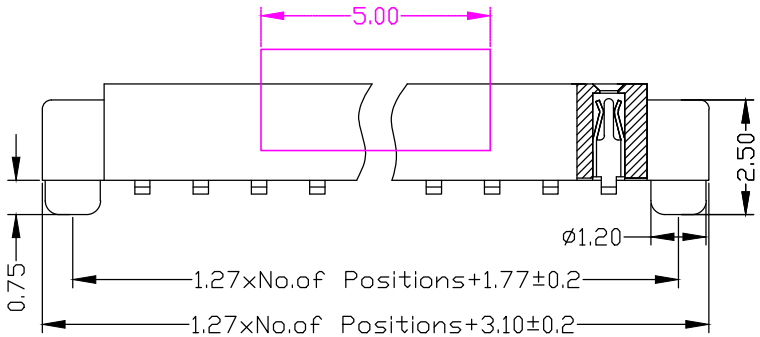

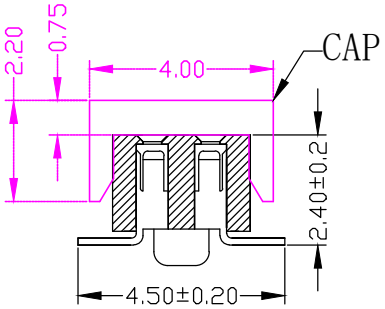

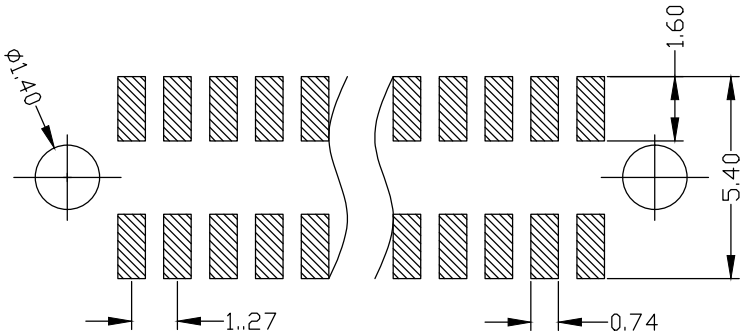

Recommended P.C.B. Layout

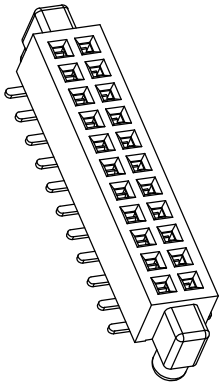

Std. Material

Contact: Phosphor bronze
Contact Plating: 1u" Au over 30u" Ni Min.
Insulator: PA6T(UL94V-0).
Insulator Colour: Black

Temperature

Operating Temp.: -40℃ to 105℃
Max. Processing Temp.: 260℃ for 10s

Electronic Specifications

Current Rating: 1 AMP
Contact Resistance: 20mΩ Max.
Insulation Resisitance: 1000MΩ Min.
Withstanding Voltage: AC 500V for 60s

Packing: Tape&Reel or agree on_____

Ordering Information

No. of Pins	Contact Plating	Insulator Material
Rows*Pins 2 x 50	SN: Tin ☐ G0: 0.8u" Gold ☐ G1: 1u" Gold ☐ G2: 1.5u" Gold ☐ G3: 2u" Gold ☐ G4: 3u" Gold ☐ G5: ___u" Gold ☐	A: PBT ☐ B: PA6T ☐ C: PA9T ☐ D: PA66 ☐ E: PA46 ☐ F: LCP ☐ G: _____ ☐
Ordering:(N) 2 X ☐		

Ordering Dimensions

A	B	C	D	H	W

PA	PB	PC	PD	PW	L

Remarks:

UNLESS OTHERWISE STATED	ORIGINALLY BY	ZWON	深圳市征华电子有限公司 Shenzhen ZWON Electronics Co.,Ltd.	Drawing No.	DRXXX-XX
DIMENSIONS IN mm TOLERANCE:	DRAWN: FHY	扫描官网 发现更多		Scale / Revision / Sheet	FIT / A / 1 of 1
ANGLEAR ±1° / LINEAR X 0.5, X.X ±0.2, X.XX ±0.1	CHECKED: FY		SERIES: FH1.27*2.1/Dual Row/SMT	ZWON P/N:	
	APPROVED: FY		TYPICAL MODEL: 1.27mm 双排母 塑高2.1 SMT U型带外柱	Customer P/N:	
	DATE:2020.12.19				