
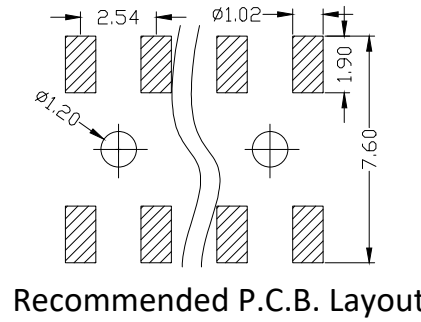


RoHS Compliant

Rev.	change details	effective date	updated by	date
A	Initial release	2020.12.19	FHY	20.12.19

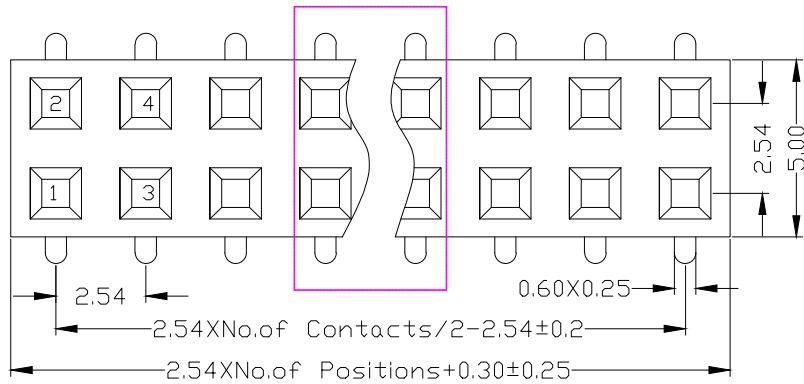

**Std. Material**

Contact: Brass  
 Contact Plating: 1u" Au over 30u" Ni Min.  
 Insulator: PA6T(UL94V-0).  
 Insulator Colour: Black

**Temperature**

Operating Temp.: -40°C to 105°C  
 Max. Processing Temp.: 260°C for 10s

**Electronic Specifications**

Current Rating : 3 AMP  
 Contact Resistance : 20mΩ Max.  
 Insulation Resistance : 1000MΩ Min.  
 Withstanding Voltage : AC 1000V for 60s

Packing : Tray or agree on \_\_\_\_\_



**Ordering Information**

No. of Pins	Contact Plating	Insulator Material
Rows*Pins	SN: Tin <input type="checkbox"/>	A: PBT <input type="checkbox"/>
2 x 40	G0: 0.8u" Gold <input type="checkbox"/>	B: PA6T <input type="checkbox"/>
Ordering:(N)	G1: 1u" Gold <input type="checkbox"/>	C: PA9T <input type="checkbox"/>
2 X <input type="checkbox"/>	G2: 1.5u" Gold <input type="checkbox"/>	D: PA66 <input type="checkbox"/>
	G3: 2u" Gold <input type="checkbox"/>	E: PA46 <input type="checkbox"/>
	G4: 3u" Gold <input type="checkbox"/>	F: LCP <input type="checkbox"/>
	G5: __u" Gold <input type="checkbox"/>	G: _____ <input type="checkbox"/>

**Ordering Dimensions**

A	B	C	D	H	W
PA	PB	PC	PD	PW	L

Remarks:

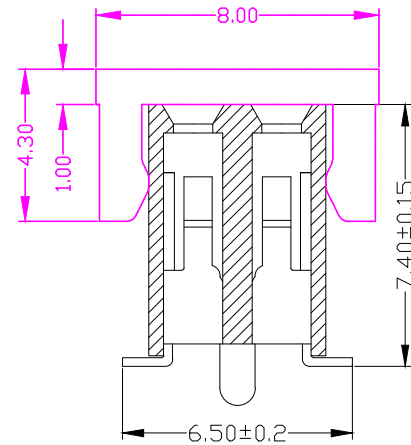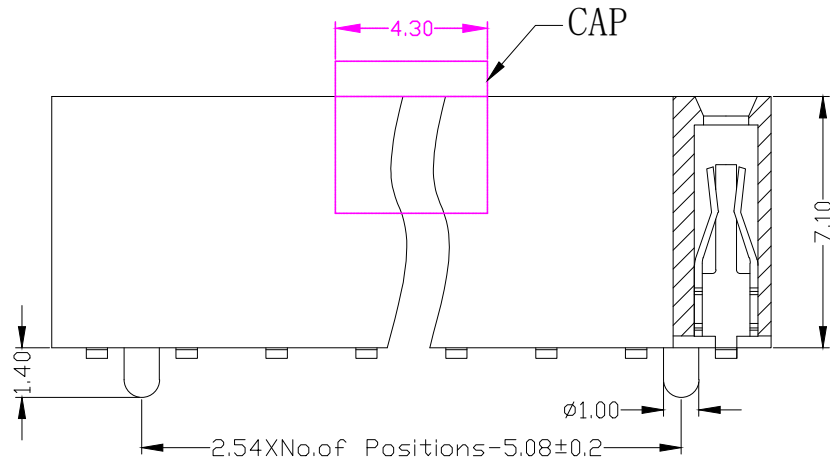

UNLESS OTHERWISE STATED		ORIGINALLY BY
DIMENSIONS IN mm		DRAWN: FHY
TOLERANCE:		CHECKED: FY
ANGLEAR ±1°	LINEAR	APPROVED: FY
	X 0.5	DATE:2020.12.19
	X.X ±0.2	
	X.XX ±0.1	



深圳市征华电子有限公司  
 Shenzhen ZWON Electronics Co.,Ltd.



SERIES: FH2.54\*7.1/Dual Row/SMT

TYPICAL 2.54mm双排母 塑高7.1  
 MODEL: SMT带柱 U型

Drawing No.	DRXXX-XX	
Scale	Revision	Sheet
FIT	A	1 of 1
ZWON P/N:		
Customer P/N:		