




RoHS Compliant


Rev.	change details	effective date	updated by	date
A	Initial release	2020.12.19	FHY	20.12.19

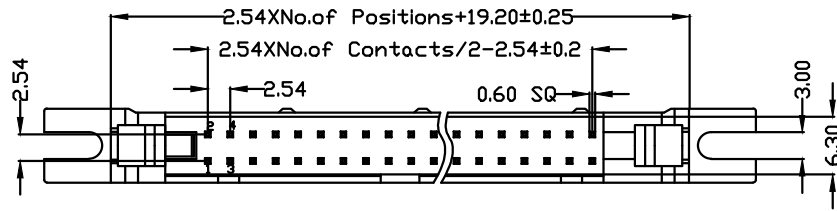




Long Latch
L=8.00



Short Latch
L=4.35

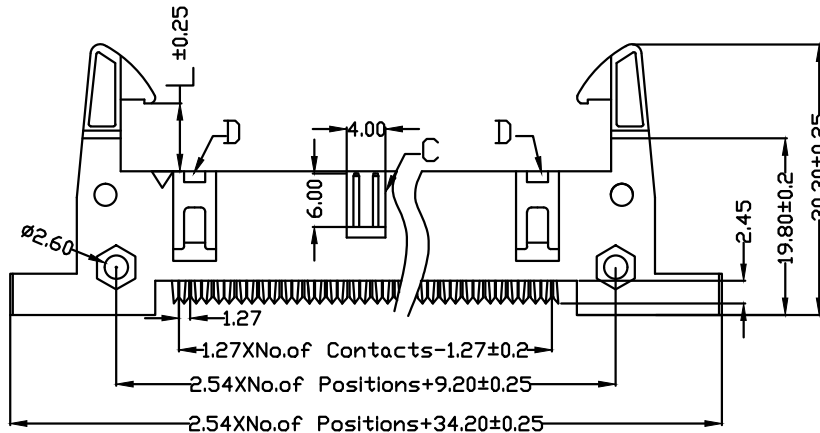

10P-18P With "C" Without "D"
20P-64P With "C" and "D"

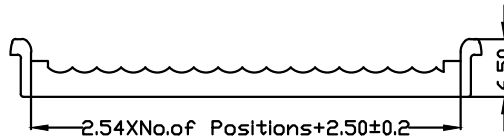

Std. Material

Contact: Brass
Contact Plating: 0.8u" Au over 30u" Ni Min.
Insulator: PBT(UL94V-0).
Insulator Colour: Black

Temperature

Operating Temp.: -40°C to 105°C
Max. Processing Temp.: 140°C

Electronic Specifications

Current Rating: 3 AMP
Contact Resistance: 20mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: AC 1000V for 60s

Packing: Tray or agree on _____

Ordering Information

No. of Pins	Contact Plating	Insulator Material
Rows*Pins	SN: Tin <input type="checkbox"/>	A: PBT <input type="checkbox"/>
2 x 40	G0: 0.8u" Gold <input type="checkbox"/>	B: PA6T <input type="checkbox"/>
Ordering:(N)	G1: 1u" Gold <input type="checkbox"/>	C: PA9T <input type="checkbox"/>
2 X <input type="checkbox"/>	G2: 1.5u" Gold <input type="checkbox"/>	D: PA66 <input type="checkbox"/>
	G3: 2u" Gold <input type="checkbox"/>	E: PA46 <input type="checkbox"/>
	G4: 3u" Gold <input type="checkbox"/>	F: LCP <input type="checkbox"/>
	G5: ___u" Gold <input type="checkbox"/>	G: _____ <input type="checkbox"/>

Ordering Dimensions

A	B	C	D	H	W
PA	PB	PC	PD	PW	L

Remarks:

UNLESS OTHERWISE STATED DIMENSIONS IN mm TOLERANCE:	ORIGINALLY BY	ZWON
	DRAWN: FHY	
	CHECKED: FY	
	APPROVED: FY	
ANGULAR ±1°	LINEAR X 0.5 X.X ±0.2 X.XX ±0.1	DATE:2020.12.19



深圳市征华电子有限公司
Shenzhen ZWON Electronics Co.,Ltd.

SERIES: EH2.54/Pressing Wire

TYPICAL MODEL: 2.54mm 牛角 压线式 刺破带锁

Drawing No.	DRXXX-XX	
Scale	Revision	Sheet
FIT	A	1 of 1
ZWON P/N:		
Customer P/N:		