


RoHS Compliant

Rev.	change details	effective date	updated by	date
A	Initial release	2020.12.19	FHY	20.12.19

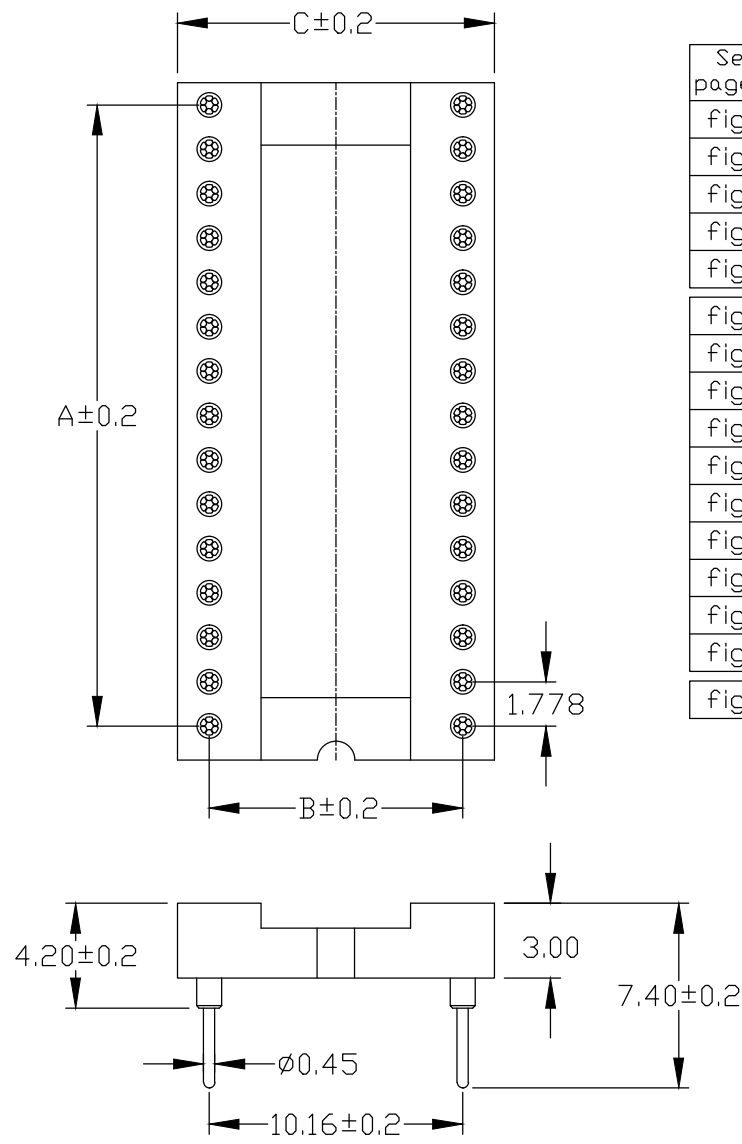

See page 33	No. of Positions	A	B	C
fig. 1	24	21.8	10.16	12.7
fig. 2	28	25.2	10.16	12.7
fig. 3	30	27.0	10.16	12.7
fig. 4	32	28.8	10.16	12.7
fig. 5	48	43.1	10.16	12.7
fig. 6	20	18.1	15.24	17.64
fig. 7	24	21.7	15.24	17.64
fig. 8	28	25.2	15.24	17.64
fig. 9	40	35.8	15.24	17.64
fig. 10	42	37.7	15.24	17.64
fig. 11	48	43.1	15.24	17.64
fig. 12	52	46.7	15.24	17.64
fig. 13	56	50.2	15.24	17.64
fig. 14	64	57.3	15.24	17.64
fig. 15	68	60.9	15.24	17.64
fig. 16	64	57.3	19.05	21.45

Std. Material
 Insulator : Black glass filled polyester PPS-GF30-FR
 Flammability : UL94V-0
 Sleeve : Brass CuZn 36Pb3(36000)
 Contact cilp (6finger):Beryllium copper (C17200)
 Mating pin ϕ : 0.40 to 0.56 mm
 Forces:(polished steel gauge ϕ 0.46mm)
 -Insertion : 2 N typ.
 -Withdrawal : 1 N typ.
 Mechanical life : min 100 cycles
 Rated current : 1Amp
 Contact resistance: Max 10m Ω
 Dielectric resistance : Min 1000V RMS

Temperature
 Operating Temp. : -40 $^{\circ}$ C to 105 $^{\circ}$ C
 Max. Processing Temp.: 260 $^{\circ}$ C for 10s

Packing : PE bag or agree on _____

Ordering Information

No. of Pins	Contact Plating	Insulator Material
Rows*Pins 2 x 50	SN: Tin <input type="checkbox"/> G0: 0.8u" Gold <input type="checkbox"/> G1: 1u" Gold <input type="checkbox"/> G2: 1.5u" Gold <input type="checkbox"/> G3: 2u" Gold <input type="checkbox"/> G4: 3u" Gold <input type="checkbox"/> G5: ___u" Gold <input type="checkbox"/>	A: PBT <input type="checkbox"/> B: PA6T <input type="checkbox"/> C: PA9T <input type="checkbox"/> D: PA66 <input type="checkbox"/> E: PA46 <input type="checkbox"/> F: LCP <input type="checkbox"/> G: _____ <input type="checkbox"/>
Ordering:(N) 2 X <input type="checkbox"/>		

Ordering Dimensions

A	B	C	D	H	W
PA	PB	PC	PD	PW	L

Remarks:

UNLESS OTHERWISE STATED
 DIMENSIONS IN mm
 TOLERANCE:

ANGLEAR $\pm 1^{\circ}$	LINEAR X 0.5 X.X ± 0.2 X.XX ± 0.1
-------------------------	---

ORIGINALLY BY
 DRAWN: FHY
 CHECKED: FY
 APPROVED: FY
 DATE:2020.12.19

ZWON
 扫描官网 发现更多

深圳市征华电子有限公司
 Shenzhen ZWON Electronics Co.,Ltd.

SERIES: Round PH1.778*3.0/Dual Row/Straight

TYPICAL MODEL: 1.778圆孔 IC座 塑高3.0 L=7.4

Drawing No.	DRXXX-XX	
Scale	Revision	Sheet
FIT	A	1 of 1
ZWON P/N:		
Customer P/N:		