

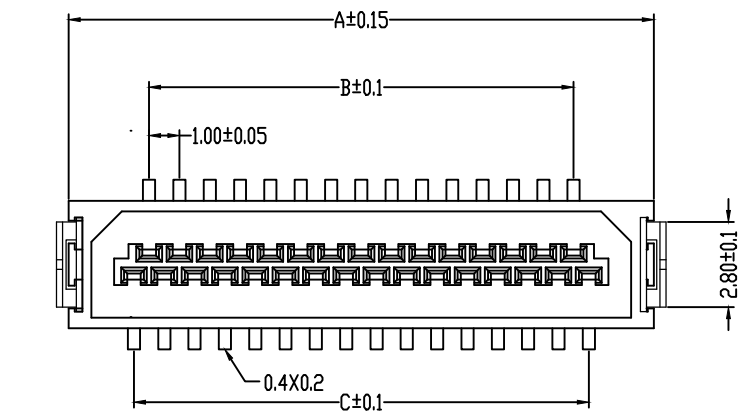
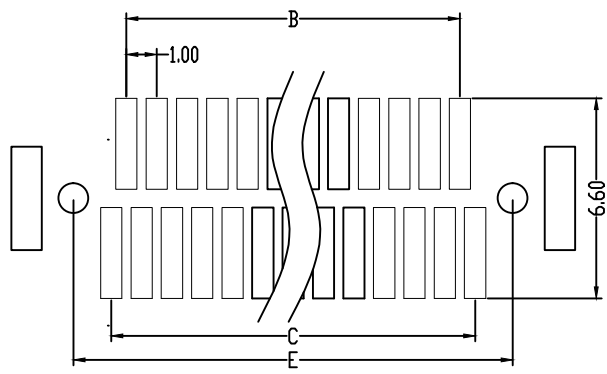


RoHS Compliant

Rev.	change details	effective date	updated by	date
A	Initial release	2020.12.19	FHY	20.12.19



NO. OF Contacts	Dimensions				
	A	B	C	E	D
31pin	19.30	14.00	15.00	18.10	21.10
41pin	24.30	19.00	20.00	23.10	26.10
51pin	29.30	24.00	25.00	28.10	31.10

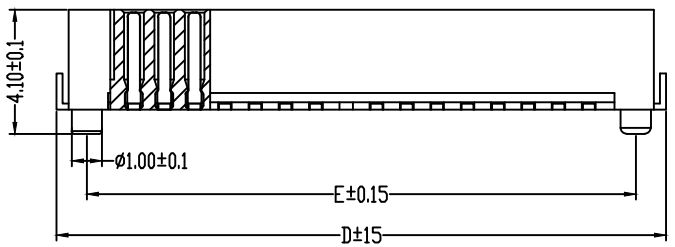

Recommended P.C.B. Layout

PERFORMANC
 Electrical Rating:AC/DC 50V 0.5A
 Insulation Resistance: 500MΩ
 Withstang Volt:200V AC/minute
 Opratng Temperature:-25° to+85°
 Contact:Phosphor Bronze G0ld-Plated
 Housing:LCP

UNLESS OTHERWISE STATED		ORIGINALLY BY
DIMENSIONS IN mm		DRAWN: FHY
TOLERANCE:		CHECKED: FY
ANGLEAR ±1°	LINEAR	APPROVED: FY
	X 0.5	DATE:2020.12.19
	X.X ±0.2	
	X.XX ±0.1	



深圳市征华电子有限公司
 Shenzhen ZWON Electronics Co.,Ltd.



SERIES: 1.00 BTB/Male/Single Slot/SMT
 TYPICAL MODEL: 1.00mm BTB 公头 单槽 SMT 带柱

Drawing No.		DRXXX-XX
Scale	Revision	Sheet
FIT	A	1 of 1
ZWON P/N:		
Customer P/N:		