

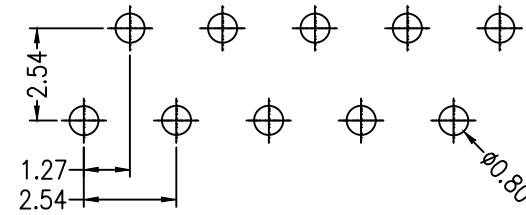
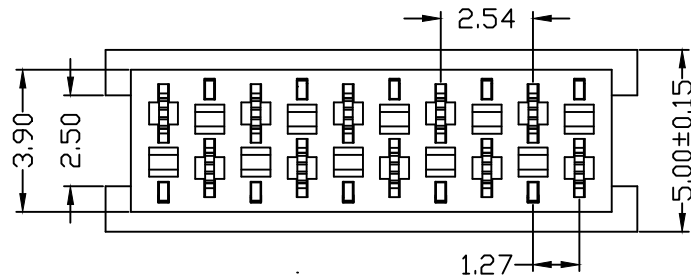


RoHS Compliant

Rev.	change details	effective date	updated by	date
A	Initial release	2020.12.19	FHY	20.12.19



Recommended P.C.B Lavout Top Side)

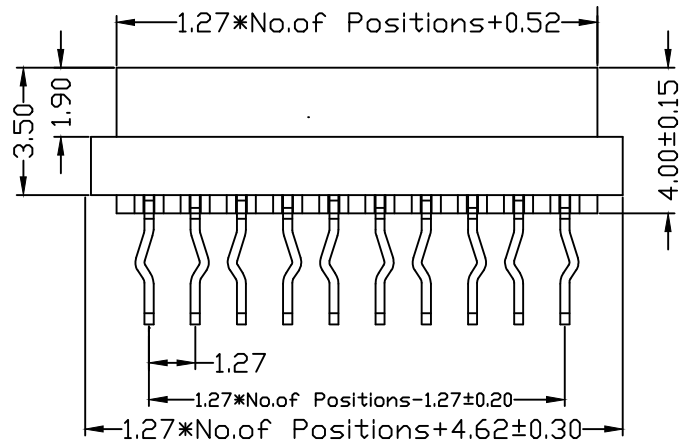

备注(Remark)

Rated Current:1.0AMP  
 Contact Resistance:20mΩ max  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ min  
 Operation Temperature:-40℃ to +105℃

Contact Material:Phosphor Bronze  
 Contact Plating:Sn Over Ni  
 Insulator Material:High Temperature Plastic UL94V-0

UNLESS OTHERWISE STATED		ORIGINALLY BY
DIMENSIONS IN mm		DRAWN: FHY
TOLERANCE:		CHECKED: FY
ANGLEAR ±1°	LINEAR	APPROVED: FY
	X 0.5	DATE:2020.12.19
	X.X ±0.2	
	X.XX ±0.1	



**深圳市征华电子有限公司**  
 Shenzhen ZWON Electronics Co.,Ltd.  
 SERIES: Board IDC/Straight/One-piece  
 TYPICAL MODEL: 板端 IDC 一件式 塑高4.0 180度 无耳

Drawing No.		DRXXX-XX
Scale	Revision	Sheet
FIT	A	1 of 1
ZWON P/N:		
Customer P/N:		