


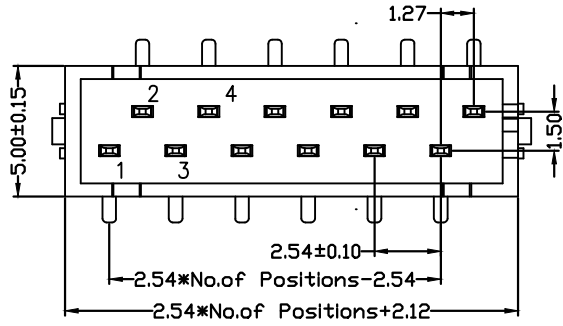



RoHS Compliant

Rev.	change details	effective date	updated by	date
A	Initial release	2020.12.19	FHY	20.12.19

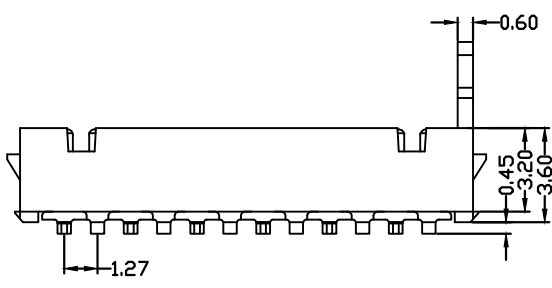


Recommended P.C.B Layout(Top Side)

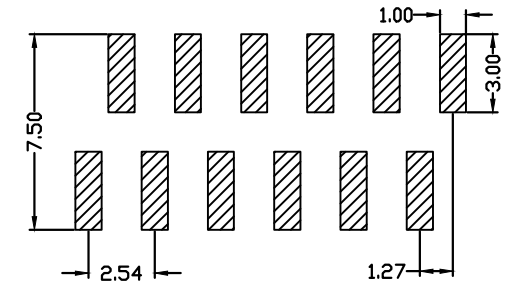

备注(Remark)
 Rated Current:1.0A
 Contact Resistance:20mΩ max
 Withstand Voltage:500V AC/Minute
 Insulation Resistance:1000MΩ min
 Operation Temperature:-25℃ to+85℃

Contact Material:Phosphor bronze
 Contact Plating:Sn over Ni
 Insulator Material:High Temperature Plastic(UL94V-0)

UNLESS OTHERWISE STATED		ORIGINALLY BY	ZWON
DIMENSIONS IN mm		DRAWN: FHY	
TOLERANCE:		CHECKED: FY	扫描官网  发现更多
ANGLEAR ±1°	LINEAR	APPROVED: FY	
	X 0.5 X.X ±0.2 X.XX ±0.1	DATE:2020.12.19	

深圳市征华电子有限公司
 Shenzhen ZWON Electronics Co.,Ltd.
 SERIES: Board DIP/SMT/One piece
 TYPICAL MODEL: 板端 DIP 一件式 塑高3.6 SMT 有耳

Drawing No.	DRXXX-XX	
Scale	Revision	Sheet
FIT	A	1 of 1
ZWON P/N:		
Customer P/N:		