

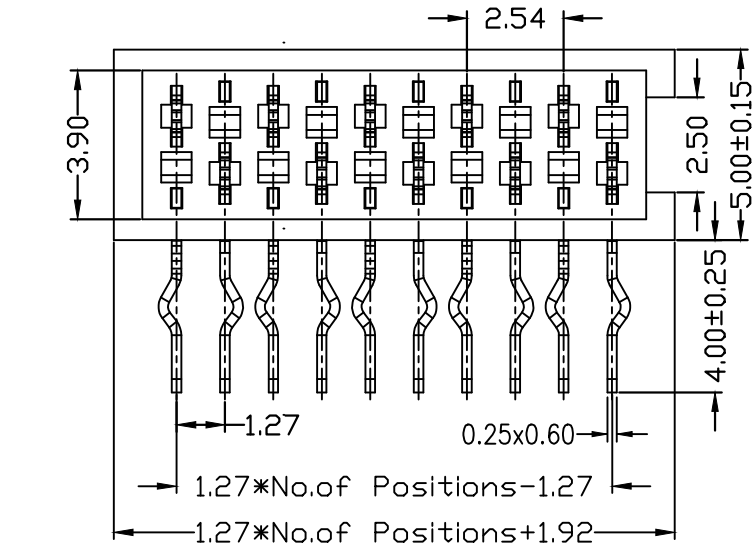
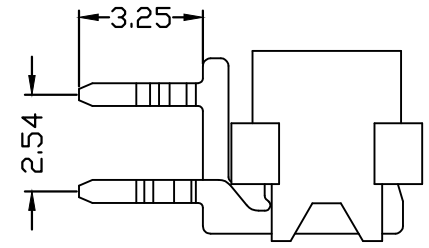


RoHS Compliant

Rev.	change details	effective date	updated by	date
A	Initial release	2020.12.19	FHY	20.12.19

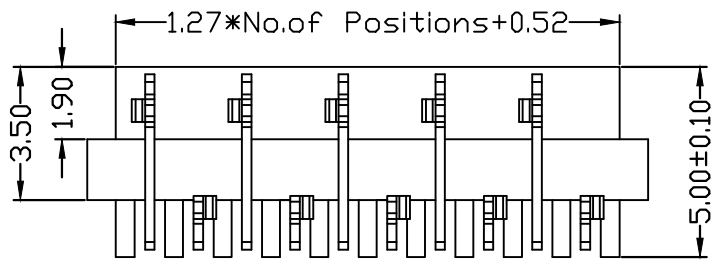


Recommended P.C.B Layout(Top Side)

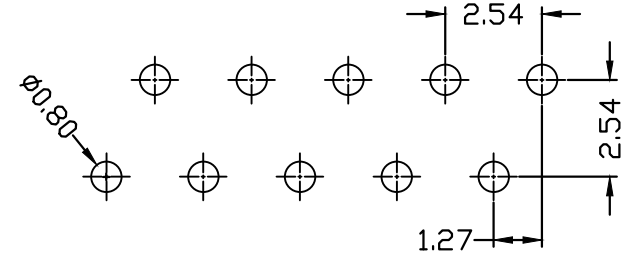

备注(Remark)

- Rated Current:1.0AMP
- Contact Resistance:20mΩ max
- Withstand Voltage:500V AC/DC
- Insulation Resistance:1000MΩ min
- Operation Temperature:-40℃ to +105℃

- Contact Material:Phosphor Bronze
- Contact Plating:Sn Over Ni
- Insulator Material:High Temperature Plastic UL94V-0

UNLESS OTHERWISE STATED DIMENSIONS IN mm TOLERANCE:	ORIGINALLY BY	 
	DRAWN: FHY	
	CHECKED: FY	
	APPROVED: FY	
DATE:2020.12.19		
ANGULAR ±1°	LINEAR X 0.5 X.X ±0.2 X.XX ±0.1	

深圳市征华电子有限公司
Shenzhen ZWON Electronics Co.,Ltd.
SERIES: Board IDC/Right Angle/One-piece
TYPICAL MODEL: 板端 IDC 一件式 塑高5.0 90度 无耳

Drawing No.	DRXXX-XX		
Scale	Revision	Sheet	
FIT	A	1 of 1	
ZWON P/N:			
Customer P/N:			