

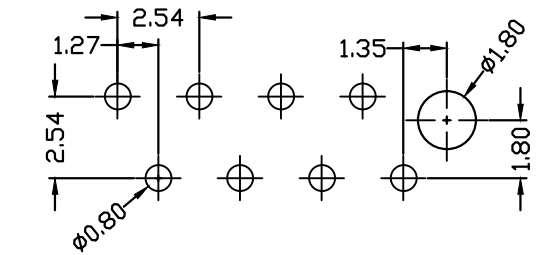
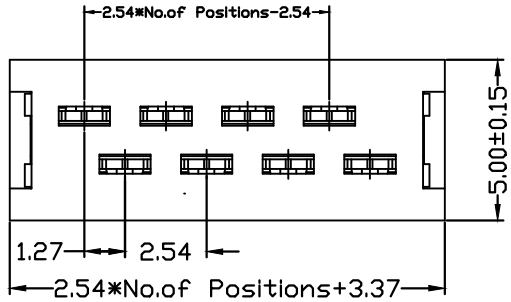


RoHS Compliant

Rev.	change details	effective date	updated by	date
A	Initial release	2020.12.19	FHY	20.12.19

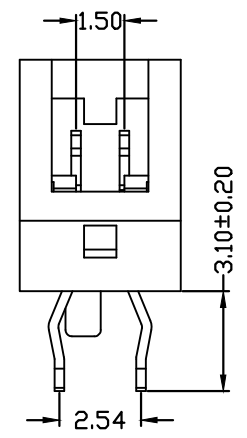

Recommended P.C.B Layout(Top Side)

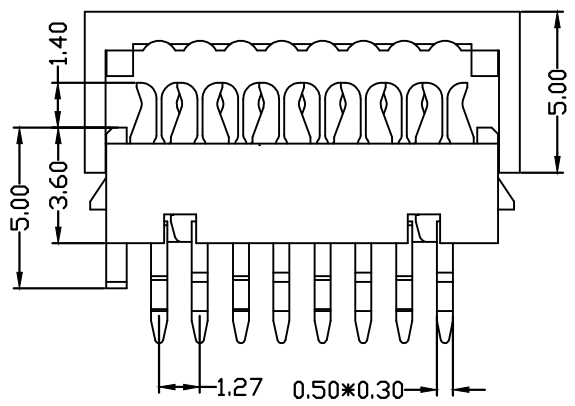

备注(Remark)
 Rated Current:1.0A
 Contact Resistance:20mΩ max
 Withstand Voltage:500V AC/Minute
 Insulation Resistance:1000MΩ min
 Operation Temperature:-25℃ to+85℃

 Contact Material:Phosphor bronze
 Contact Plating:Sn over Ni
 Insulator Material:High Temperature Plastic(UL94V-0)

UNLESS OTHERWISE STATED		ORIGINALLY BY	ZWON	深圳市征华电子有限公司 Shenzhen ZWON Electronics Co.,Ltd.
DIMENSIONS IN mm		DRAWN: FHY		
TOLERANCE:		CHECKED: FY	扫描官网	发现更多
ANGLEAR ±1°	LINEAR	APPROVED: FY		
	X 0.5	DATE:2020.12.19		
X.X ±0.2				
X.XX ±0.1				

Drawing No.		DRXXX-XX	
Scale	Revision	Sheet	
FIT	A	1 of 1	
SERIES: Wire IDC/Straight/Two-piece		ZWON P/N:	
TYPICAL MODEL: 线端 DIP 两件式 塑高3.6 180度 无耳		Customer P/N:	