

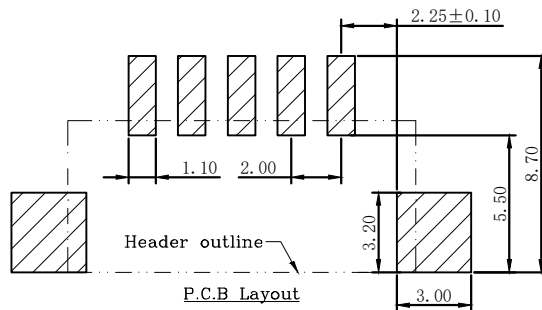

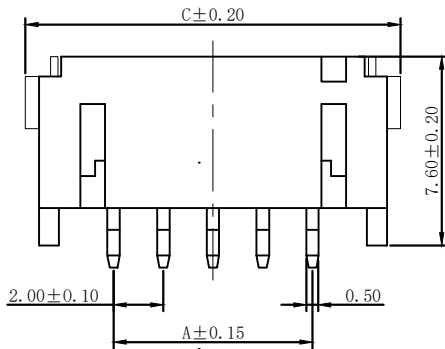


RoHS Compliant

Rev.	change details	effective date	updated by	date
A	Initial release	2020.12.19	FHY	20.12.19

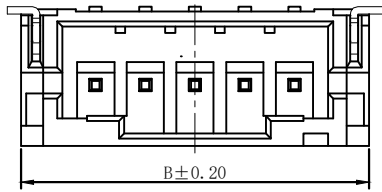

■ SPECIFICATIONS

- Voltage rating: 100V AC, DC
- Current rating: 2A, AC, DC
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 1000M min
- Temperature range: -25° C ~ +85° C
- Contact resistance: 10mΩ max

■ WAFER

- Part No. :
- Poles : 02-16P
- Material: Nylon9T UL94V-0
- Pin Material: Brass /Tin-plated
- Material (Solder Tabs): Phosphor Bronze /Tin-plated

Part No.	Dimension (mm)		
	A	B	B
02	2.00	8.00	9.10
03	4.00	10.00	11.10
04	6.00	12.00	13.10
05	8.00	14.00	15.10
06	10.00	16.00	17.10
07	12.00	18.00	19.10
08	14.00	20.00	21.10
09	16.00	22.00	23.10
10	18.00	24.00	25.10
11	20.00	26.00	27.10
12	22.00	28.00	29.10
13	24.00	30.00	31.10
14	26.00	32.00	33.10
15	28.00	34.00	35.10
16	30.00	36.00	37.10

Recommended P.C.B. Layout

UNLESS OTHERWISE STATED		ORIGINALLY BY
DIMENSIONS IN mm		DRAWN: FHY
TOLERANCE:		CHECKED: FY
ANGLEAR ±1°	LINEAR	APPROVED: FY
	X 0.5	DATE: 2020.12.19
	X.X ±0.2	
	X.XX ±0.1	



深圳市征华电子有限公司
Shenzhen ZWON Electronics Co.,Ltd.



SERIES: 2.0 Wafer/SMT

TYPICAL MODEL: 2.0 Wafer 卧式SMT

Drawing No.	DRXXX-XX	
Scale	Revision	Sheet
FIT	A	1 of 1
ZWON P/N:		
Customer P/N:		