

RoHS Compliant



Rev.	change details	effective date	updated by	date
A	Initial release	2020.12.19	FHY	20.12.19

■ SPECIFICATIONS



- Voltage rating: 250V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 10mΩ max

■ WAFER

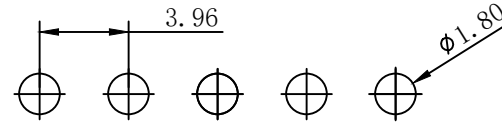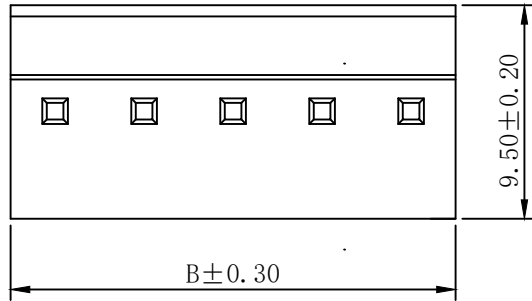

- Part No.:
- Poles : 02-20
- Material: Nylon 66 UL94V-2
- Pin Material: Brass /Tin-plated

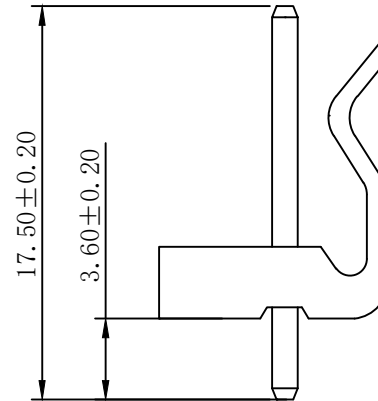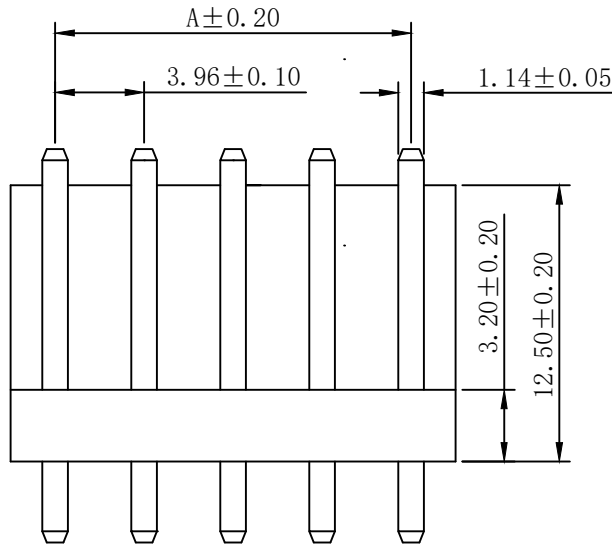

P.C.B. LAYOUT



PART NO.	Dimensions (mm)	
	A	B
02	3.96	7.92
03	7.92	11.88
04	11.88	15.84
05	15.84	19.80
06	19.80	23.76
07	23.76	27.72
08	27.72	31.68
09	31.68	35.64
10	35.64	39.60
11	39.60	43.56
12	43.56	47.52
13	47.52	51.48
14	51.48	55.44
15	55.44	59.40
16	59.40	63.36
17	63.36	67.32
18	67.32	71.28
19	71.28	75.24
20	75.24	79.20

UNLESS OTHERWISE STATED DIMENSIONS IN mm TOLERANCE:	ORIGINALLY BY	 
	DRAWN: FHY	
	CHECKED: FY	
	APPROVED: FY	
DATE: 2020.12.19		



深圳市征华电子有限公司
Shenzhen ZWON Electronics Co.,Ltd.

SERIES: 3.96 Wafer/Straight

TYPICAL MODEL: 3.96 Wafer 180度 Type2

Drawing No.	DRXXX-XX	
Scale	Revision	Sheet
FIT	A	1 of 1
ZWON P/N:		
Customer P/N:		