

RoHS Compliant



Rev.	change details	effective date	updated by	date
A	Initial release	2020.12.19	FHY	20.12.19

■ SPECIFICATIONS



- Voltage rating: 250V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 10mΩ max

■ WAFER

- Part No. : W4202RD-2*NP-4.2
- Poles : 02-24
- Material: Nylon 66 UL94V-2
- Pin Material: Brass /Tin-plated

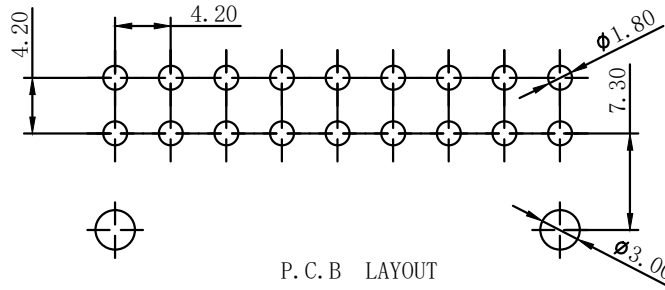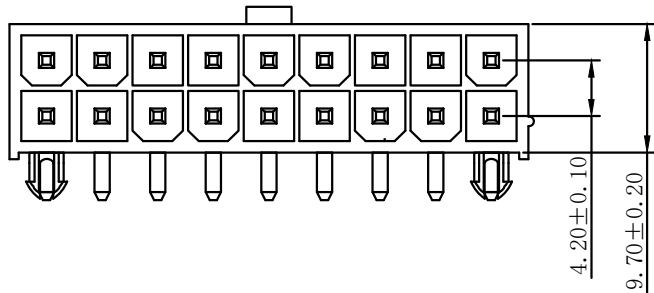

P.C.B LAYOUT

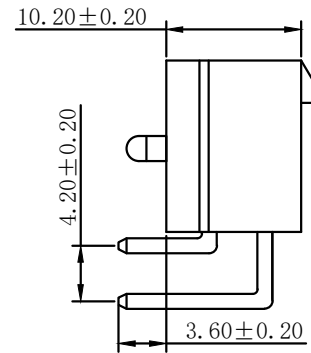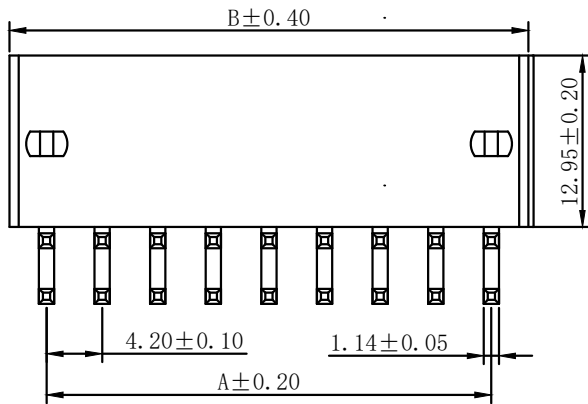

Part No	Dimensions (mm)	
	A	B
2*01-4.2	—	5.60
2*02-4.2	4.20	9.80
2*03-4.2	8.40	14.00
2*04-4.2	12.60	18.20
2*05-4.2	16.80	22.40
2*06-4.2	21.00	26.60
2*07-4.2	25.20	30.80
2*08-4.2	29.40	35.00
2*09-4.2	33.60	39.20
2*10-4.2	37.80	43.40
2*11-4.2	42.00	47.60
2*12-4.2	46.20	51.80

UNLESS OTHERWISE STATED		ORIGINALLY BY
DIMENSIONS IN mm		DRAWN: FHY
TOLERANCE:		CHECKED: FY
ANGLEAR ±1°	LINEAR	APPROVED: FY
	X 0.5	DATE: 2020.12.19
	X.X ±0.2	
	X.XX ±0.1	

ZWON



深圳市征华电子有限公司
Shenzhen ZWON Electronics Co.,Ltd.

SERIES: 4.2 Wafer/Right Angle

TYPICAL MODEL: 4.2 Wafer 90度 Type6

Drawing No.	DRXXX-XX	
Scale	Revision	Sheet
FIT	A	1 of 1
ZWON P/N:		
Customer P/N:		