

RoHS Compliant

| Rev. | change details | effective date | updated by | date |
|------|-----------------|----------------|------------|----------|
| A | Initial release | 2020.12.19 | FHY | 20.12.19 |




■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 10mΩ max


■ WAFER

- Part No. :
- Poles : 02-06P
- Material: Nylon 66 UL94V-2
- Pin Material: Brass /Tin-plated


| Part No | Dimensions(mm) | |
|---------|----------------|-------|
| | A | B |
| 02 | 4.20 | 9.60 |
| 03 | 8.40 | 13.80 |
| 04 | 12.60 | 18.00 |
| 05 | 16.80 | 22.20 |
| 06 | 21.00 | 26.40 |

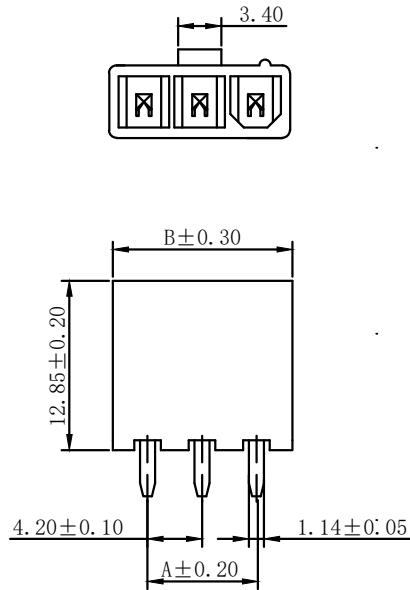


P. C. B LAYOUT




2 position



4 position



5 position



6 position

| | | |
|-------------------------|-----------|------------------|
| UNLESS OTHERWISE STATED | | ORIGINALLY BY |
| DIMENSIONS IN mm | | DRAWN: FHY |
| TOLERANCE: | | CHECKED: FY |
| ANGLEAR ±1° | LINEAR | APPROVED: FY |
| | X 0.5 | DATE: 2020.12.19 |
| | X.X ±0.2 | |
| | X.XX ±0.1 | |



深圳市征华电子有限公司
Shenzhen ZWON Electronics Co.,Ltd.

SERIES: 4.2 Wafer/Single Row/Straight

TYPICAL MODEL: 4.2 Wafer 单排 180度 Type1

| | | |
|---------------|----------|--------|
| Drawing No. | DRXXX-XX | |
| Scale | Revision | Sheet |
| FIT | A | 1 of 1 |
| ZWON P/N: | | |
| Customer P/N: | | |