


RoHS Compliant

Rev.	change details	effective date	updated by	date
A	Initial release	2020.12.19	FHY	20.12.19


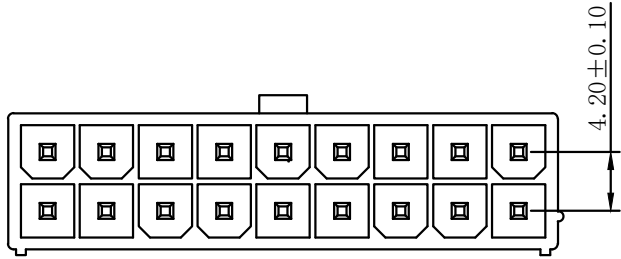


■ SPECIFICATIONS


- Voltage rating: 250V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C ~ +85° C
- Contact resistance: 10mΩ max

■ WAFER

- Part No. :
- Poles : 02-24
- Material: Nylon 66 UL94V-2
- Pin Material: Brass /Tin-plated

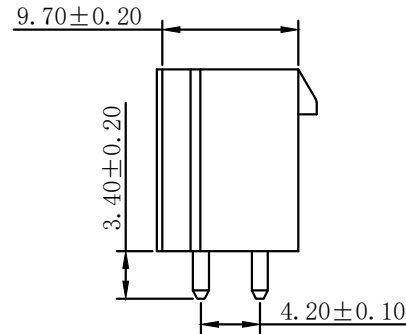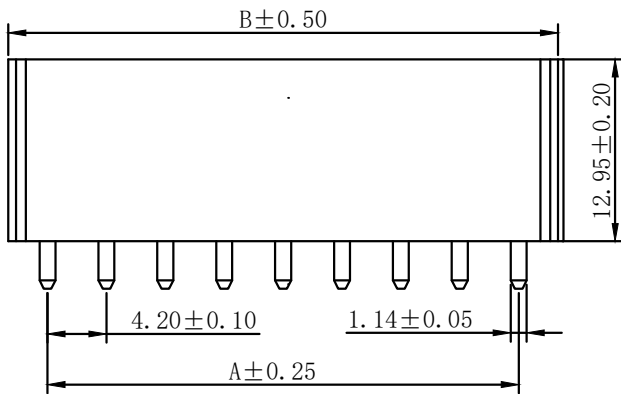

PART NO.	Dimensions (mm)	
	A	B
2*01	--	5.60
2*02	4.20	9.80
2*03	8.40	14.00
2*04	12.60	18.20
2*05	16.80	22.40
2*06	21.00	26.60
2*07	25.20	30.80
2*08	29.40	35.00
2*09	33.60	39.20
2*10	37.80	43.40
2*11	42.00	47.60
2*12	46.20	51.80

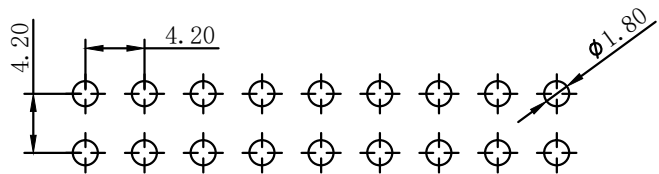

P. C. B LAYOUT

UNLESS OTHERWISE STATED DIMENSIONS IN mm TOLERANCE:	ORIGINALLY BY	ZWON
	DRAWN: FHY	
	CHECKED: FY	
	APPROVED: FY	
DATE: 2020.12.19		

ZWON

深圳市征华电子有限公司
Shenzhen ZWON Electronics Co.,Ltd.

Drawing No.	DRXXX-XX	
Scale	Revision	Sheet
FIT	A	1 of 1

SERIES: 4.2 Wafer/Dual Row/Straight

TYPICAL MODEL: 4.2 Wafer 双排 180度 Type1

ZWON P/N:	
Customer P/N:	

