RoHS Compliant

Rev.	change details	effective date	updated by	date
A	Initial release	2020.12.19	FHY	20.12.19

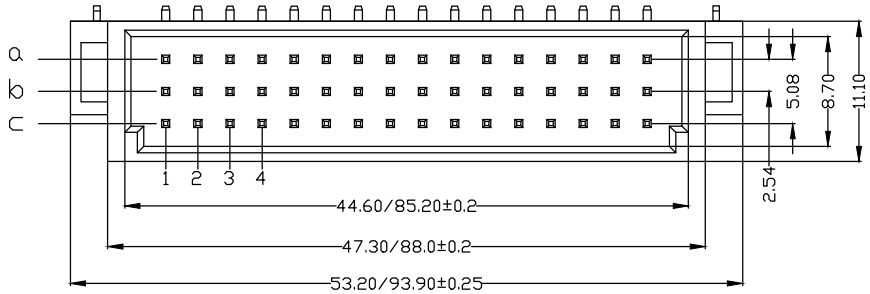

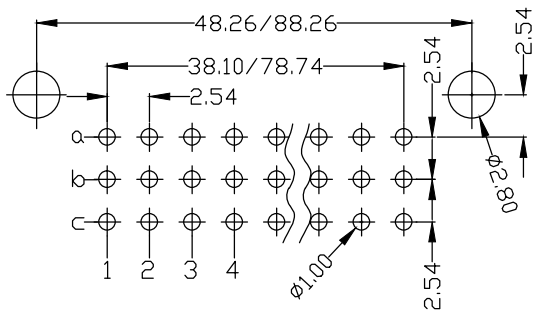

Recommended P.C.B. Layout

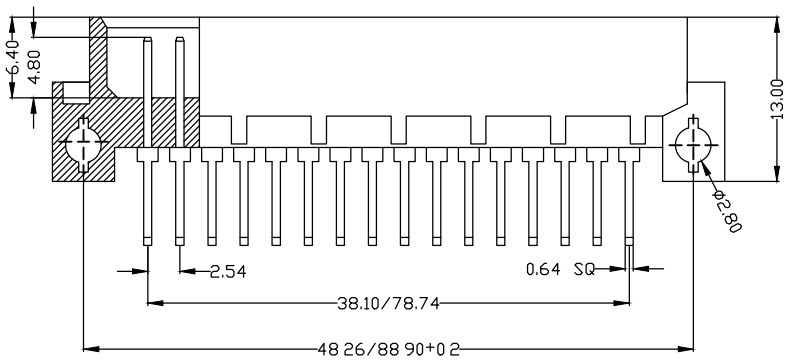



Std. Material

Contact: Brass
Contact Plating: 0.8u" Au over 30u" Ni Min.
Insulator: PBT(UL94V-0).
Insulator Colour: Black

Temperature

Operating Temp.: -40℃ to 105℃
Max. Processing Temp.: 140℃

Electronic Specifications

Current Rating: 3 AMP
Contact Resistance: 20mΩ Max.
Insulation Resisitance: 1000MΩ Min.
Withstanding Voltage: AC 1000V for 60s

Packing: Tray or agree on_____

Ordering Information

No. of Pins	Contact Plating	Insulator Material
Rows*Pins 3 x 32	SN: Tin ☐ G0: 0.8u" Gold ☐ G1: 1u" Gold ☐ G2: 1.5u" Gold ☐ G3: 2u" Gold ☐ G4: 3u" Gold ☐ G5: ___u" Gold ☐	A: PBT ☐ B: PA6T ☐ C: PA9T ☐ D: PA66 ☐ E: PA46 ☐ F: LCP ☐ G: _____ ☐
Ordering:(N) 3 X ☐		

ORDERING INFORMATION

NUMBER OF CONTACTS		Pitch	ROWS/Positions with Contacts	
48	96	2.54	a+b+c	
32A	64A		a+c	
32B	64B		a+b	
16	32		a	
24	48	5.08 HALF-LOADED	a+b+c ALL EVEN NO	
16	32		a+b ALL EVEN NO	

Ordering Dimensions

A	B	C	D	H	W

PA	PB	PC	PD	PW	L

Remarks:

UNLESS OTHERWISE STATED		ORIGINALLY BY	
DIMENSIONS IN mm TOLERANCE:		DRAWN: FHY	
ANGLEAR ±1°	LINEAR X 0.5 X.X ±0.2 X.XX ±0.1	CHECKED: FY	
		APPROVED: FY	
		DATE:2020.12.19	

ZWON

扫描官网 发现更多

深圳市征华电子有限公司
Shenzhen ZWON Electronics Co.,Ltd.

SERIES: European Socket/Triple Row/Right Angle

TYPICAL MODEL: 欧式插座 三排 90度 公座

Drawing No.	DRXXX-XX	
Scale	Revision	Sheet
FIT	A	1 of 1
ZWON P/N:		
Customer P/N:		