


RoHS Compliant

Rev.	change details	effective date	updated by	date
A	Initial release	2020.12.19	FHY	20.12.19

ORDERING INFORMATION

NUMBER OF CONTACTS	Pitch	ROWS/Positions with Contacts
48	96	a+b+c
32A	64A	a+c
32B	64B	a+b
16	32	a
24	48	5.08 HALF-LOADED a+b+c ALL EVEN NO
16	32	5.08 HALF-LOADED a+b ALL EVEN NO

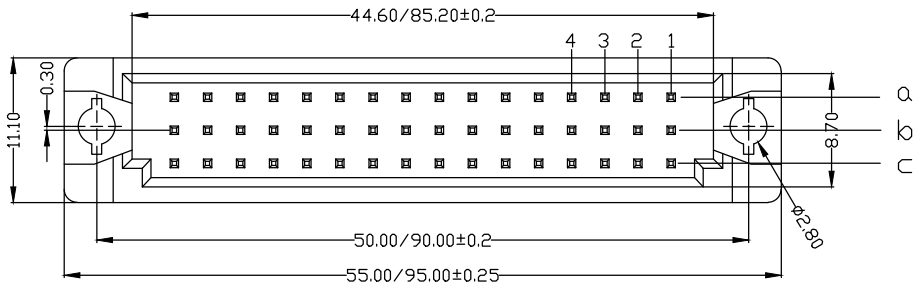

Std. Material
 Contact: Brass
 Contact Plating: 0.8u" Au over 30u" Ni Min.
 Insulator: PBT(UL94V-0).
 Insulator Colour: Black

Temperature
 Operating Temp.: -40°C to 105°C
 Max. Processing Temp.: 140°C

Electronic Specifications
 Current Rating : 3 AMP
 Contact Resistance : 20mΩ Max.
 Insulation Resistance : 1000MΩ Min.
 Withstanding Voltage : AC 1000V for 60s
Packing : Tray or agree on _____


Ordering Information

No. of Pins	Contact Plating	Insulator Material
Rows*Pins 3 x 32	SN: Tin <input type="checkbox"/> G0: 0.8u" Gold <input type="checkbox"/> G1: 1u" Gold <input type="checkbox"/> G2: 1.5u" Gold <input type="checkbox"/> G3: 2u" Gold <input type="checkbox"/> G4: 3u" Gold <input type="checkbox"/> G5: ___u" Gold <input type="checkbox"/>	A: PBT <input type="checkbox"/> B: PA6T <input type="checkbox"/> C: PA9T <input type="checkbox"/> D: PA66 <input type="checkbox"/> E: PA46 <input type="checkbox"/> F: LCP <input type="checkbox"/> G: _____ <input type="checkbox"/>



Ordering Dimensions

A	B	C	D	H	W
PA	PB	PC	PD	PW	L

Remarks:



DIM"A"	2.50	4.00
--------	------	------

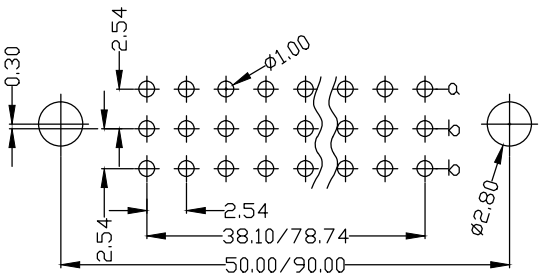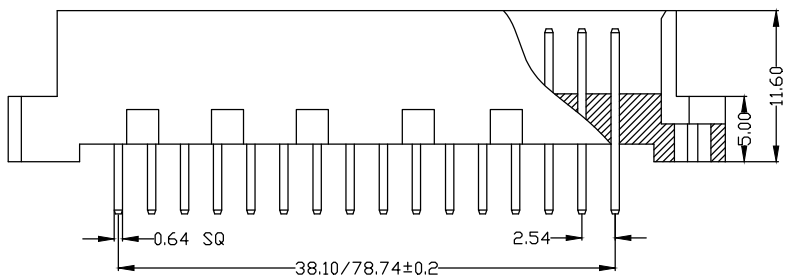

Recommended P.C.B. Layout

UNLESS OTHERWISE STATED	ORIGINALLY BY
DIMENSIONS IN mm	DRAWN: FHY
TOLERANCE:	CHECKED: FY
ANGLEAR ±1°	APPROVED: FY
LINEAR X 0.5	DATE:2020.12.19
X.X ±0.2	
X.XX ±0.1	



深圳市征华电子有限公司
 Shenzhen ZWON Electronics Co.,Ltd.
 SERIES: European Socket/Triple Row/Straight
 TYPICAL MODEL: 欧式插座 三排 180度 公座

Drawing No.	DRXXX-XX	
Scale	Revision	Sheet
FIT	A	1 of 1
ZWON P/N:		
Customer P/N:		