


RoHS Compliant

| Rev. | change details | effective date | updated by | date |
|------|-----------------|----------------|------------|----------|
| A | Initial release | 2020.12.19 | FHY | 20.12.19 |

ORDERING INFORMATION

| NUMBER OF CONTACTS | | Pitch | ROWS/Positions with Contacts |
|--------------------|-----|---------------------|------------------------------|
| 48 | 96 | 2.54 | a+b+c |
| 32A | 64A | | a+c |
| 32B | 64B | | a+b |
| 16 | 32 | | a |
| 24 | 48 | 5.08 HALF-LOADED | a+b+c ALL EVEN NO |
| 16 | 32 | | a+b ALL EVEN NO |


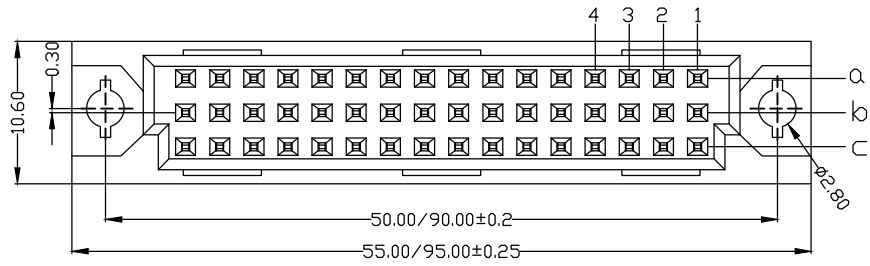


Std. Material
 Contact: Brass
 Contact Plating: 0.8u" Au over 30u" Ni Min.
 Insulator: PBT(UL94V-0).
 Insulator Colour: Black

Temperature
 Operating Temp.: -40°C to 105°C
 Max. Processing Temp.: 140°C

Electronic Specifications
 Current Rating : 3 AMP
 Contact Resistance : 20mΩ Max.
 Insulation Resistance : 1000MΩ Min.
 Withstanding Voltage : AC 1000V for 60s

Packing : Tray or agree on _____

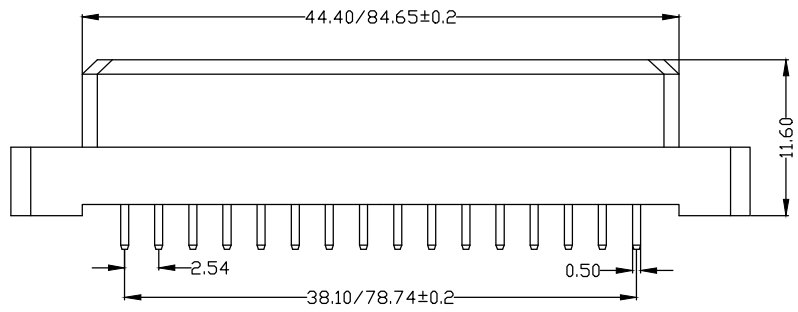


Ordering Information

| No. of Pins | Contact Plating | Insulator Material |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Rows*Pins 3 x 32 | SN: Tin <input type="checkbox"/> G0: 0.8u" Gold <input type="checkbox"/> G1: 1u" Gold <input type="checkbox"/> G2: 1.5u" Gold <input type="checkbox"/> G3: 2u" Gold <input type="checkbox"/> G4: 3u" Gold <input type="checkbox"/> G5: ___u" Gold <input type="checkbox"/> | A: PBT <input type="checkbox"/> B: PA6T <input type="checkbox"/> C: PA9T <input type="checkbox"/> D: PA66 <input type="checkbox"/> E: PA46 <input type="checkbox"/> F: LCP <input type="checkbox"/> G: _____ <input type="checkbox"/> |

Ordering Dimensions

| A | B | C | D | H | W |
|----|----|----|----|----|---|
| PA | PB | PC | PD | PW | L |

Remarks:

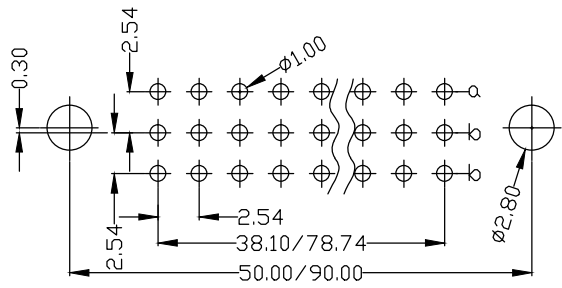

Recommended P.C.B. Layout

| | |
|---------------------------------------|-----------------|
| UNLESS OTHERWISE STATED | ORIGINALLY BY |
| DIMENSIONS IN mm | DRAWN: FHY |
| TOLERANCE: | CHECKED: FY |
| ANGLEAR ±1° | APPROVED: FY |
| LINEAR X 0.5 X.X ±0.2 X.XX ±0.1 | DATE:2020.12.19 |



深圳市征华电子有限公司
 Shenzhen ZWON Electronics Co.,Ltd.

SERIES: European Socket/Triple Row/Straight

TYPICAL MODEL: 欧式插座 三排 180度 母座

| | | |
|---------------|----------|--------|
| Drawing No. | DRXXX-XX | |
| Scale | Revision | Sheet |
| FIT | A | 1 of 1 |
| ZWON P/N: | | |
| Customer P/N: | | |

| | | |
|--------|------|------|
| DIM"A" | 2.50 | 4.00 |
|--------|------|------|