


RoHS Compliant

Rev.	change details	effective date	updated by	date
A	Initial release	2020.12.19	FHY	20.12.19

ORDERING INFORMATION

NUMBER OF CONTACTS	Pitch	ROWS/Positions with Contacts
32	2.54	a b
16	2.54	a-
16	5.08 HALF-LOADED	a b ALL EVEN NO.

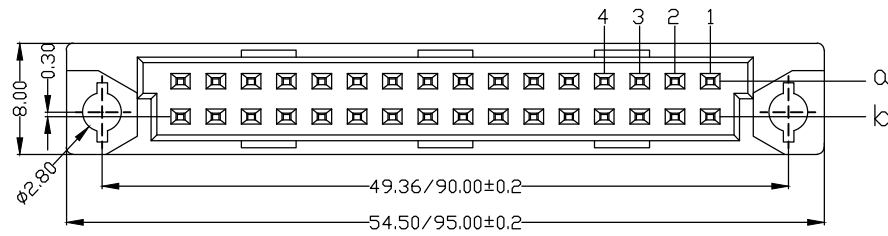

**Std. Material**  
 Contact: Brass  
 Contact Plating: 0.8u" Au over 30u" Ni Min.  
 Insulator: PBT(UL94V-0).  
 Insulator Colour: Black

**Temperature**  
 Operating Temp.: -40°C to 105°C  
 Max. Processing Temp.: 140°C

**Electronic Specifications**  
 Current Rating : 3 AMP  
 Contact Resistance : 20mΩ Max.  
 Insulation Resistance : 1000MΩ Min.  
 Withstanding Voltage : AC 1000V for 60s

**Packing** : Tray or agree on \_\_\_\_\_




**Ordering Information**

No. of Pins	Contact Plating	Insulator Material
Rows*Pins 2 x 32	SN: Tin <input type="checkbox"/> G0: 0.8u" Gold <input type="checkbox"/> G1: 1u" Gold <input type="checkbox"/> G2: 1.5u" Gold <input type="checkbox"/> G3: 2u" Gold <input type="checkbox"/> G4: 3u" Gold <input type="checkbox"/> G5: ___u" Gold <input type="checkbox"/>	A: PBT <input type="checkbox"/> B: PA6T <input type="checkbox"/> C: PA9T <input type="checkbox"/> D: PA66 <input type="checkbox"/> E: PA46 <input type="checkbox"/> F: LCP <input type="checkbox"/> G: _____ <input type="checkbox"/>

**Ordering Dimensions**

A	B	C	D	H	W
PA	PB	PC	PD	PW	L

Remarks:

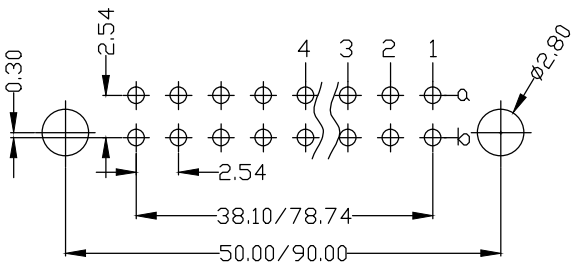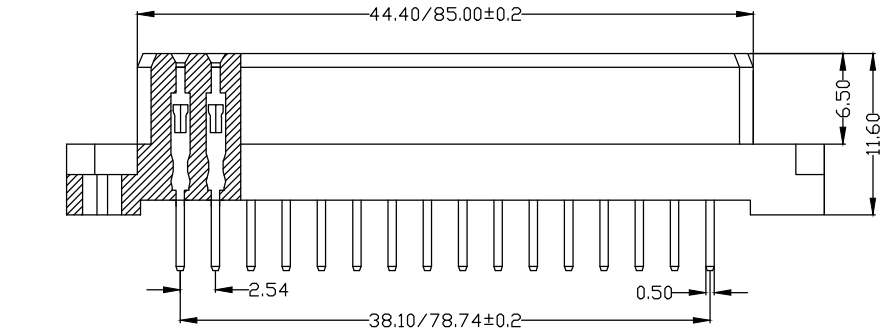

Recommended P.C.B. Layout

UNLESS OTHERWISE STATED	ORIGINALLY BY
DIMENSIONS IN mm	DRAWN: FHY
TOLERANCE:	CHECKED: FY
LINEAR X 0.5	APPROVED: FY
ANGLEAR ±1° X.X ±0.2	DATE:2020.12.19
X.XX ±0.1	



深圳市征华电子有限公司  
 Shenzhen ZWON Electronics Co.,Ltd.



SERIES: European Socket/Dual Row/Straight  
 TYPICAL MODEL: 欧式插座 双排 180度 母座

Drawing No.	DRXXX-XX	
Scale	Revision	Sheet
FIT	A	1 of 1
ZWON P/N:		
Customer P/N:		